


FONTANA BRUSHED NICKEL COMMERCIAL TEMPERATURE CONTROL AUTOMATIC HANDS FREE SENSOR FAUCET SPECS

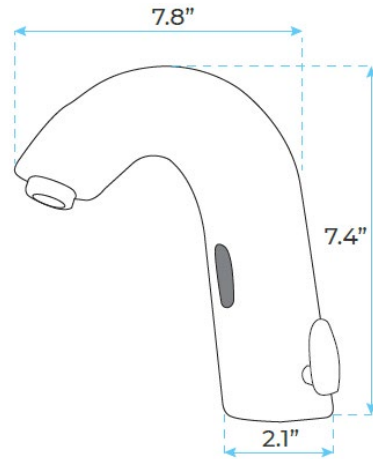

SPECS:

Power: DC:6V(4AA alkaline battery)

AC:220V-240V; 50/60HZ

Flow rate: 1.8 GPM (6.81 L / min)

Detection Zone: 12-15 cm or adjustable

Motor valve lifespan: up to 500000 flushes

Battery lifespan: 100000 cycles

Static Power Consumption: 0.36mw

Working Power consumption: 0.5mw

Inductive Opening Time: < 1 second

Inductive Closing Time: < 2 second

Dia.of inlet / outlet pipe: G1/2"

Flux: $\geq 0.07L/S$

Temperature: 0.1-50°C

Suitable Water Pressure: 0.3-1.2 MPa

